



LIQUIDYNAMICS™




FLUID HANDLING
TECHNOLOGY

DOUBLE WALL 2-IN-1 LUBE OIL STORAGE TANKS

As a complement to the wide range of steel storage tanks and tank systems, LiquidDynamics is now offering double wall 2-in-1 tanks and tank systems that are ideal for use in storing and transferring engine oil, gear oil, transmission fluid, hydraulic fluid and anti-freeze. These tanks are UL2258 listed and are suitable for storing combustible fluids with a flashpoint of 130° F or greater and therefore cannot be used for storing gasoline, diesel fuel, kerosene or any similar flammable fluids.

Features and Benefits:

- Safety, Reliability and Optimal Space Utilization
- The primary inner tank is a blow molded, high density polyethylene (HDPE) which goes through a fluorination treatment to improve permeation resistance.
- The secondary containment is constructed of galvanized steel which is galvanized on both sides for maximum corrosion resistance. It is then welded and edged using the latest state-of-the-art manufacturing techniques.
- A visual leak indicator is provided in each tank to allow visual monitoring of the inner tank integrity.
- Fittings are cast aluminum for greater strength and improved sealing capability.
- Tanks have four 2" openings and include a tank level gauge and audible vent alarm to help prevent over filling of tank.
- Tanks are equipped with an extremely rugged floor stand which is also galvanized to ensure corrosion resistance.
- Convenient carry handles and light weight allow easy maneuverability of tanks
- 30 year limited warranty

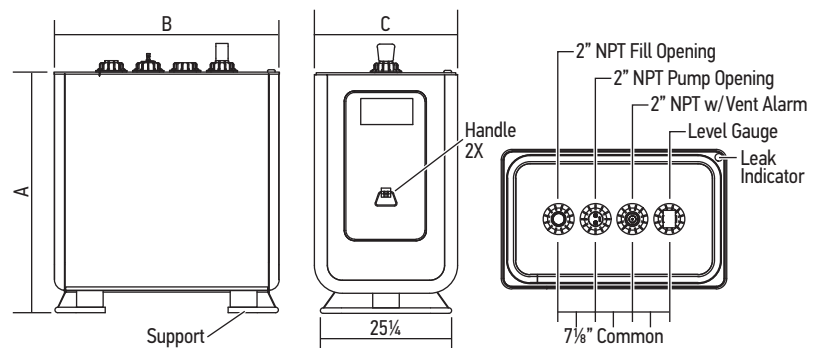

Part Number	Capacity	Weight	A	B	C
901280	190 gal.	150 lb.	46 1/4"	43 1/8"	27 1/2"
901281	260 gal.	185 lb.	62"	43 1/8"	27 1/2"