

FUEL HANDLING – HAND PUMPS


MODEL **FR31** P/N 560028

Heavy Cast Iron quart stroke Pump that reliably and accurately dispenses one quart with each handle rotation. Rack and pinion design allows for easy calibration and provision for padlock feature. Includes swing return drain tube and telescoping suction pipe.




MODEL **FR152** P/N 560000

Lightweight cast aluminum Piston Hand Pump uses a stainless steel inner liner to prevent wear of cylinder. Pump delivers up to 20 gallons per 100 strokes and is ideal for use with gasoline, diesel fuel and light oils. Includes anti-siphoning device, padlock feature, bung adapter and telescoping suction pipe.

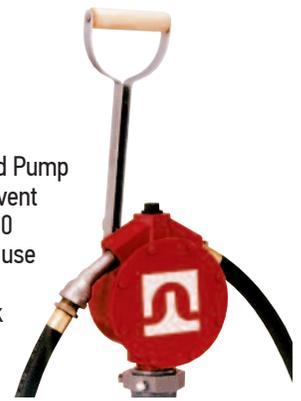

MODEL **FR112** P/N 560003

Cast aluminum Rotary Vane Pump suitable for pumping medium viscosity liquids as well as oils, gasoline and diesel fuels. Rotary action allows smooth, continuous fluid transfer at up to 10 gallons per 100 revolutions. Complete with telescoping suction pipe, bung adapter, 8 ft. nitrile hose with nozzle and vacuum breaker to prevent siphoning.

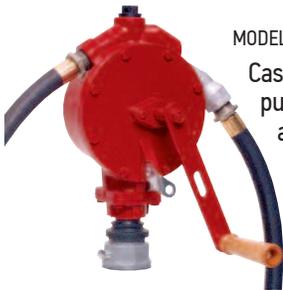


MODEL **MA-5R** P/N 10005R

Cast iron Rotary Hand Pump, two vane construction, for use with lubricating oils. Comes complete with 2" bung adapter and three piece steel suction pipe. Not recommended for use with gasoline. Approx. 20 revolutions/gal.



MODEL **MA-20** P/N 560008


Polypropylene Piston Pump uses Buna-N seals for transfer of fluids such as engine oil, gear oil, antifreeze and similar fluids compatible with materials of construction. Fits drums up to 55 gallons. Approx. 12 strokes/gal.

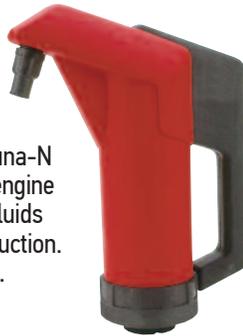

P/N **10015**

High Flow rotary hand pump discharges approximately 1 quart per revolution and can empty a 55 gallon drum in a matter of minutes. Pump body is constructed of lightweight aluminum with gear driven impellers and Nitrile seals which makes this pump ideal for transferring larger quantities of lightweight oils, hydraulic fluids, transmission fluid, antifreeze and diesel fuel.

Pump is supplied with bung adapter, suction pipe, inlet strainer and 1" x 6' oil discharge hose with nozzle.

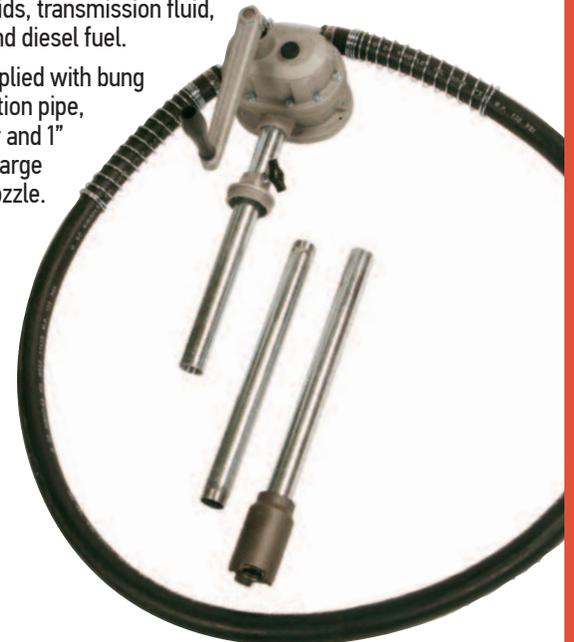

MODEL **MA-16** P/N 10016

Heavy duty hand operated lever drum pump, with high volume output and hose thread fitting at discharge. Fits 16, 30 and 55 gallon drums. For use with light oils, ATF, 100% antifreeze, hydraulic fluids and diesel fuel. Includes telescoping suction pipe. Approx. 12 strokes/gal.

