


FUEL HANDLING – 115/230 VAC



MODEL **FR610G** P/N 560026

115 VAC, 15 GPM Pump Kit with 12' Hose and Manual Nozzle

Compact pump kit for use with diesel fuel, gasoline, kerosene, E15 and biodiesel up to B20. Has UL listed 1/4 HP explosion proof motor, 2" NPTM threaded base to allow tank connection. Includes check valve and inlet strainer and uses carbon vanes with iron rotor, 2 year warranty.



MODEL **FR610GA** P/N 560026A

115 VAC, 15 GPM Pump Kit with 12' Hose and Automatic Nozzle

Same as P/N 560026 above, except has automatic shutoff nozzle.

MODEL **FR700V** P/N 560014

115/230 VAC, 18 GPM Pump Kit with 12' Hose and Manual Nozzle

Rugged, positive displacement, heavy duty pump has 1/3 HP UL listed explosion proof motor with sealed bearings, thermal overload protection and heavy duty switch. Pump is compatible for use with diesel fuel, gasoline, kerosene, E15 and biodiesel up to B20. 2" NPTM threads allows tank mounting, pump has automatic bypass, integral check valve and has 2 year warranty.



MODEL **FR700VA** P/N 560014A

115/230 VAC, 13 GPM Pump Kit with 12' Hose and Automatic Nozzle

Same as P/N 560014 above, except includes an automatic shutoff nozzle.

MODEL **FR700VN** P/N 560011

115/230 VAC, 20 GPM Pump Only

Same as P/N 560014 but does not include hose or nozzle – supplied as PUMP ONLY.

MODEL **BD700V** P/N 560014BD

115/230 VAC, 18 GPM Biodiesel Pump Kit with 12' Hose and Manual Nozzle




Complete pumping kit for Biodiesel Fuels B20 – B100. System has 1/3 HP UL/cUL listed pump and motor. This heavy duty pump has all the features included in the FR700VN (P/N 560011) described above, but made for use with B20 – B100 Biodiesel fuel. System includes 12' hose and manual nozzle.

MODEL **FR300VN** P/N 560042-A

115/230 VAC, 20 GPM Ultra High Flow – Pump Only

High flow, 1/2 HP, AC utility rotary vane pump has an open flow rate of 20 GPM. This pump is UL/cUL listed dual voltage pump, motor has sealed bearings, heavy duty on/off switch and thermal overload protection and built in junction box. Housing is cast iron with iron rotor and carbon vanes, pump also incorporates a check valve, pressure relief valve and strainer. 2" NPTM threaded bung connection. Pump carries a 2 year warranty.

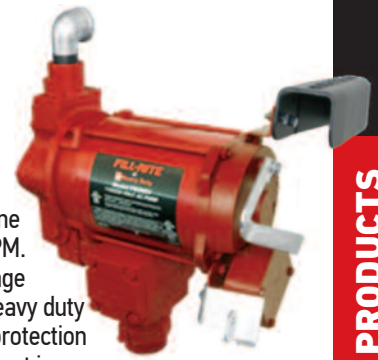

MODEL **FR310VN** P/N 560027-A

115/230 VAC, 35 GPM Ultra High Flow – Pump Only

Ultra high flow pump has 3/4 HP UL/cUL listed explosion proof motor provides flow rates up to 35 GPM. This pump provides long life, has sealed bearings, heavy duty on/off switch and thermal overload protection. Cast iron housing incorporates a built in junction box and uses an iron rotor with carbon vanes, also has a check valve, strainer and automatic bypass valve. Bung connection is 2" NPTM and unit carries a 2 year warranty.



MODEL **FR310VB** P/N 560027

115/230 VAC, 35 GPM Ultra High Flow Pump Kit with 18' Hose and Ultra High Flow Automatic Nozzle


Same as P/N 560027-A above except this system includes an Ultra High Flow automatic shutoff nozzle to maximize flow rate while providing the convenience of an automatic shutoff pump system.



MODEL **BD310VN** P/N 560027BD

115/230 VAC, 35 GPM Ultra High Flow Biodiesel – Pump Only

Same as P/N 560027-A above except this pump is designed for use with Biodiesel Fuels B20 – B100. This is a pump only, hose and nozzle NOT included.



P/N **560091-DC**

12 VDC transfer pump for use with gasoline, diesel fuel and kerosene is UL and CSA approved. Pump kit is supplied with 13 GPM pump w/1" NPT inlet, automatic shutoff nozzle, nozzle holder, easily accessible inlet filter screen, 3/4" x 13' hose and adjustable suction pipe (43" max. length) and power supply cable.

P/N **560091-AC**

Same as P/N 560091-DC except has 115 VAC motor.

