

HAND OPERATED GREASE GUNS

P/N 500102

Mini pistol grip grease gun for use with 3 oz. cartridges or bulk suction loading. Features dual port head which allows straight on use. Bright zinc plate finish and knurled barrel. Includes 6" rigid extension with 4 jaw coupler. Approximately 35 strokes per oz.



P/N 500101

Standard lever grease gun with bright zinc finish for use with 14 oz. grease cartridge. Supplied with 6½" rigid extension and 4 jaw coupler. May be fitted with bulk loader nipple, P/N 500123, sold separately. Approximately 18 strokes per oz.

P/N 500101F

Same as P/N 500101 except provided with 12" flex extension in place of rigid extension.




P/N 500100

Handgrip grease gun with 3 way loading capability, 14 oz. cartridges, filler pump or bulk fill. Features an air vent and dual port head, which allows straight on use. Bright zinc plate finish with knurled barrel. Includes 4" rigid extension with 4 jaw coupler. Approximately 35 strokes per oz.


P/N 500100F

Same as P/N 500100 except provided with 12" flex extension in place of rigid extension.

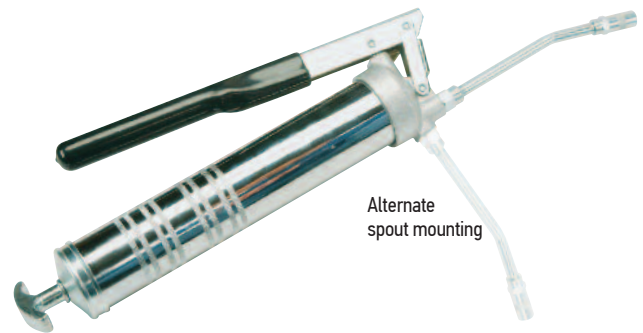

P/N 500129

Heavy duty die cast aluminum head has 3 way loading capability; 14 oz. cartridge, filler pump or bulk fill. Rugged steel tube with non-slip knurling will provide years of reliable service. Provided with 6" rigid extension and heavy duty 4 jaw coupler. Approximately 24 strokes per oz.

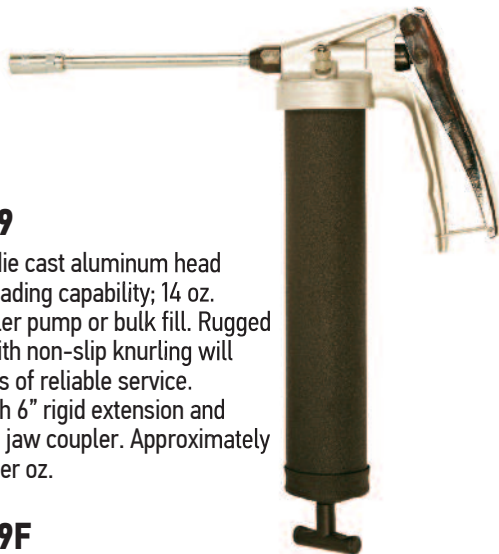

P/N 500129F

Same as P/N 500129 except provided with 12" flex extension in place of rigid extension.

P/N 500128

Premium high performance lever grease gun with heavy steel barrel, cast iron head and bright zinc finish. Has short stroke capability and will produce better than 10,000 PSI using extra leverage steel handle. 6" rigid extension with 4 jaw coupler may be attached in one of two directions for maximum flexibility. Fill 3 ways, bulk fill pump using available bulk loader nipple (P/N 500123 sold separately), 14 oz. cartridge or bulk hand fill. Approximately 15 strokes per oz.

P/N 500128F

Same as P/N 500128 except provided with 12" flex extension in place of rigid extension.