

MECHANICAL METERS

Liquidynamics supplies a broad selection of oil meters, control valves and accessories. Preset and non-preset meters are available in both mechanical and electronic versions.


Mechanical Meters Preset and Non-Preset

Accuracy of these meters is +/- 0.65% within the flow range of 0.4 to 4 GPM. Maximum operating pressure is 1,000 PSI.

MODEL **BM03 Non-Preset**

P/N 530100

Pint calibration with **8 pint dial capacity** and 1/4 pint graduation, totalizes in pints. Ten inch tall discharge spout is equipped with a 1/4" manual tip designed to allow easy filling of differentials. Inlet is 1/2" NPTF swivel. For use with gear oils.

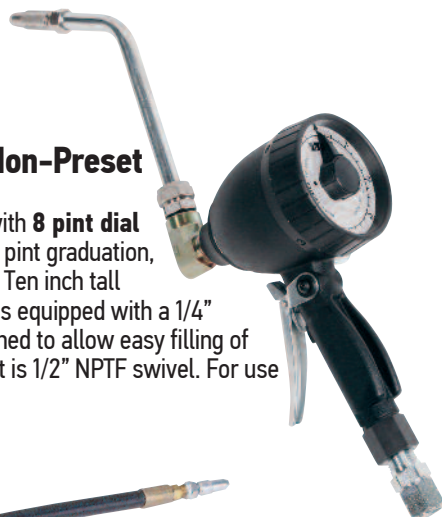


MODEL **BM15 Non-Preset** P/N 530102

Quart calibration with **16 quart dial capacity** and 1/4 quart graduation, totalizes in quarts. Meter comes with a flex discharge spout and manual shutoff tip. For use with motor oils, gear oils, ATF and antifreeze (ethylene glycol).

MODEL **BM19 Preset**

P/N 530107

Quart calibration with preset capability, **16 quart dial capacity**, 1 quart graduations and quart totalizer. Comes complete with rigid spout, non drip tip and 1/2" NPTF inlet swivel. For use with motor oils, gear oils, ATF and antifreeze (ethylene glycol).

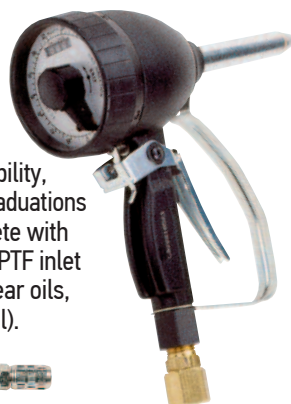

MODEL **BM19-HM** P/N 530107-HM

Same as 530107 but **with** 1/2" x 12" hose and manual tip

MODEL **BM19-RH** P/N 530107-RH

Same as 530107 but **with** 4" rigid spout and manual tip, 7" overall length

MODEL **BM19-BA** P/N 530107-BA

Same as 530107 but **with** rigid bent spout and automatic tip, 7" overall length

MODEL **BM08 Non-Preset**

P/N 530101

Quart calibration with **16 quart dial capacity** and 1/4 quart graduations, totalizes in quarts. Rigid discharge spout has an automatic non drip tip. Meter comes standard with 1/2" NPTF inlet swivel. For use with motor oils, gear oils, ATF and antifreeze (ethylene glycol).



MODEL **BM20 Preset** P/N 530109

Quart calibration with preset capability, **60 quart dial capacity**, 1 quart graduations and gallon totalizer.

Comes complete with rigid spout, non drip tip and 1/2" NPTF inlet swivel. For use with motor oils, gear oils, ATF and antifreeze (ethylene glycol).



MODEL **BM20-HM** P/N 530109-HM

Same as 530109 but **with** 1/2" x 12" hose and manual tip

MODEL **BM20-RH** 530109-RH

Same as 530109 but **with** 4" rigid spout and manual tip, 7" overall length

MODEL **BM20-BA** 530109-BA

Same as 530109 but **with** rigid bent spout and automatic tip, 7" overall length

MODEL **BM20G Preset**

P/N 530113

Gallon calibration with preset capability, **60 gallon dial capacity**, 1 gallon graduations and gallon totalizer. 4 GPM maximum. Meter includes rigid spout, non drip tip and 1/2" NPTF inlet swivel. For use with motor oils, ATF and antifreeze (ethylene glycol).

