

ELECTRONIC METERS PRESET

Model K500 Series

The K-500 Electronic Preset Meter may be used to dispense a preset quantity of oil, transmission fluid, hydraulic fluid, antifreeze and other compatible fluids. It is powered by four, field replaceable 1.5V AA batteries. Units of measurement are easily switched between pints, quarts, gallons and liters. The meter flow range is 1/4 to 8 GPM with a maximum operating pressure of 1,000 PSI and an accuracy of +/- 1/2%. Preset capability is from 0.1 to 99.9

units and may be programmed with up to 5 different frequently used preset quantities in addition to quick recall of the last used preset quantity. May also be used to show flow rate in gallons per minute. This preset meter is available with a wide selection of discharge spouts to fit most any application. Discharge spout may be positioned at five different angles and tip rotates 90°. Inlet is 1/2" NPTF swivel.

Spout may be rotated 90° and discharge tip may be rotated 270°


P/N 100351-RSA shown



Order meter/control handle with your choice of spout and tip, for example – if you wish to order the meter and control handle with a flex spout and manual tip as shown below – then order **P/N 100351-FM**.



P/N **100351-RSA**
K500 Meter **includes** Rigid Spout and Automatic Tip; tip rotates 270°

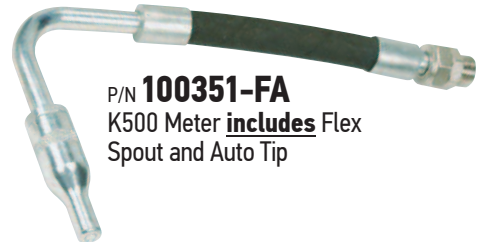

P/N **100351-FA**
K500 Meter **includes** Flex Spout and Auto Tip



P/N **100351-RM**
K500 Meter **includes** Rigid Spout and 1/4" Manual Tip; tip rotates 270°



P/N **100351-FM**
K500 Meter **includes** Flex Spout and 1/4" Manual Tip



P/N **100351-RMH**
K500 Meter **includes** Rigid Spout and High Flow Manual Tip; tip rotates 270°



P/N **100351-FMH**
K500 Meter **includes** Flex Spout and High Flow Manual Tip