

ELECTRONIC METER NON-PRESET

Model LD250 Series


These compact and lightweight, electronic digital meters provide the user with a cost effective method for measuring fluids such as engine oil, gear oil, transmission fluid, and 100% antifreeze (ethylene glycol). Two rotating oval gears are used to provide a simple, reliable method of measurement. Meters are powered by two field replaceable AAA alkaline batteries, with a minimum

one year life expectancy. Accuracy is +/- 0.5% over a flow range of 0.26 to 8 GPM and maximum operating pressure of 1,000 PSI, inlet is 1/2" NPTF swivel. **The units of measure are shown on the LCD display and are easily changed from quarts to pints, gallons or liters, cumulative total indicates gallons (or liters).**


Order meter/control handle with your choice of spout and tip, for example – if you wish to order the meter and control handle with a flex spout and manual tip as shown below – then order **P/N 100200-FM**.




P/N 100200-RA shown

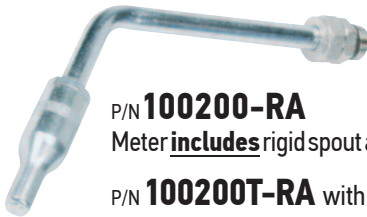

P/N **100200-RA**
Meter **includes** rigid spout and auto tip
P/N **100200T-RA** with trigger lock

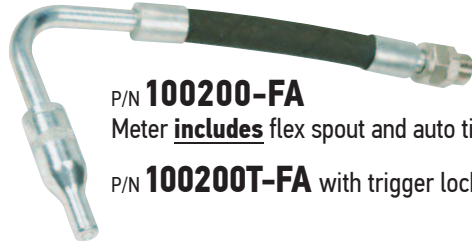


P/N **100200-FA**
Meter **includes** flex spout and auto tip
P/N **100200T-FA** with trigger lock

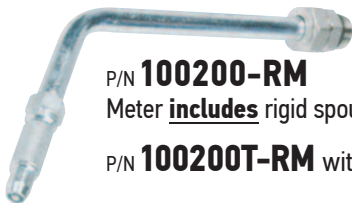


P/N **100200-RM**
Meter **includes** rigid spout and manual tip
P/N **100200T-RM** with trigger lock



P/N **100200-FM**
Meter **includes** flex spout and manual tip
P/N **100200T-FM** with trigger lock

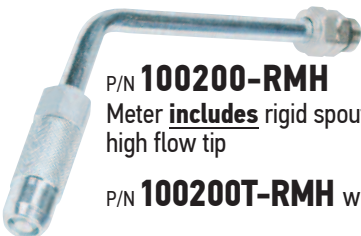

P/N **100200-RMH**
Meter **includes** rigid spout and manual high flow tip
P/N **100200T-RMH** with trigger lock

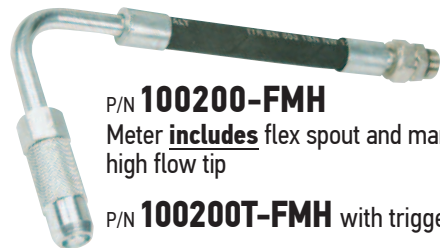

P/N **100200-FMH**
Meter **includes** flex spout and manual high flow tip
P/N **100200T-FMH** with trigger lock



P/N **100200-HM**
Meter **includes** 3/8" x 12" hose and 1/4" manual tip
P/N **100200T-HM** with trigger lock



P/N **100200-HMH**
Meter **includes** 1/2" x 12" hose and 1/2" manual high flow tip
P/N **100200T-HMH** with trigger lock