


OIL REEL SYSTEM SELECTION GUIDE

The selection guide below allows you to customize the pump/reel/meter system to best fit your application and allows you to take advantage of "system" pricing.

The selection guide steps you through the selection process with the end result being a unique model number detailing your system configuration. Model RS25R25ENQRAFR2 is shown below. It includes a 5:1 stub pump, foot valve, 25 foot hose reel w/ 2 foot jumper hose, electronic meter with quart calibration, rigid spout, auto-tip and a 150 PSI rated filter/regulator with gauge.

Note: Optional items that you may need to complete your system: P/N 540025 Relief Valve Kit, 750 PSI, P/N 540035 2" Double Tap with 3/8" Return Port, P/N 22159 2" Bung Spacer with 3/8" Return Port.

Note: If you will be plumbing any of these systems with hard, rigid pipe, it is highly recommended to install a relief valve kit, model P/N 540025. When using a stub pump, use relief valve kit P/N 540025 in conjunction with 2" double tap P/N 540035, or bung spacer P/N 22159, for convenient return of "relieved" fluid. See page 10.

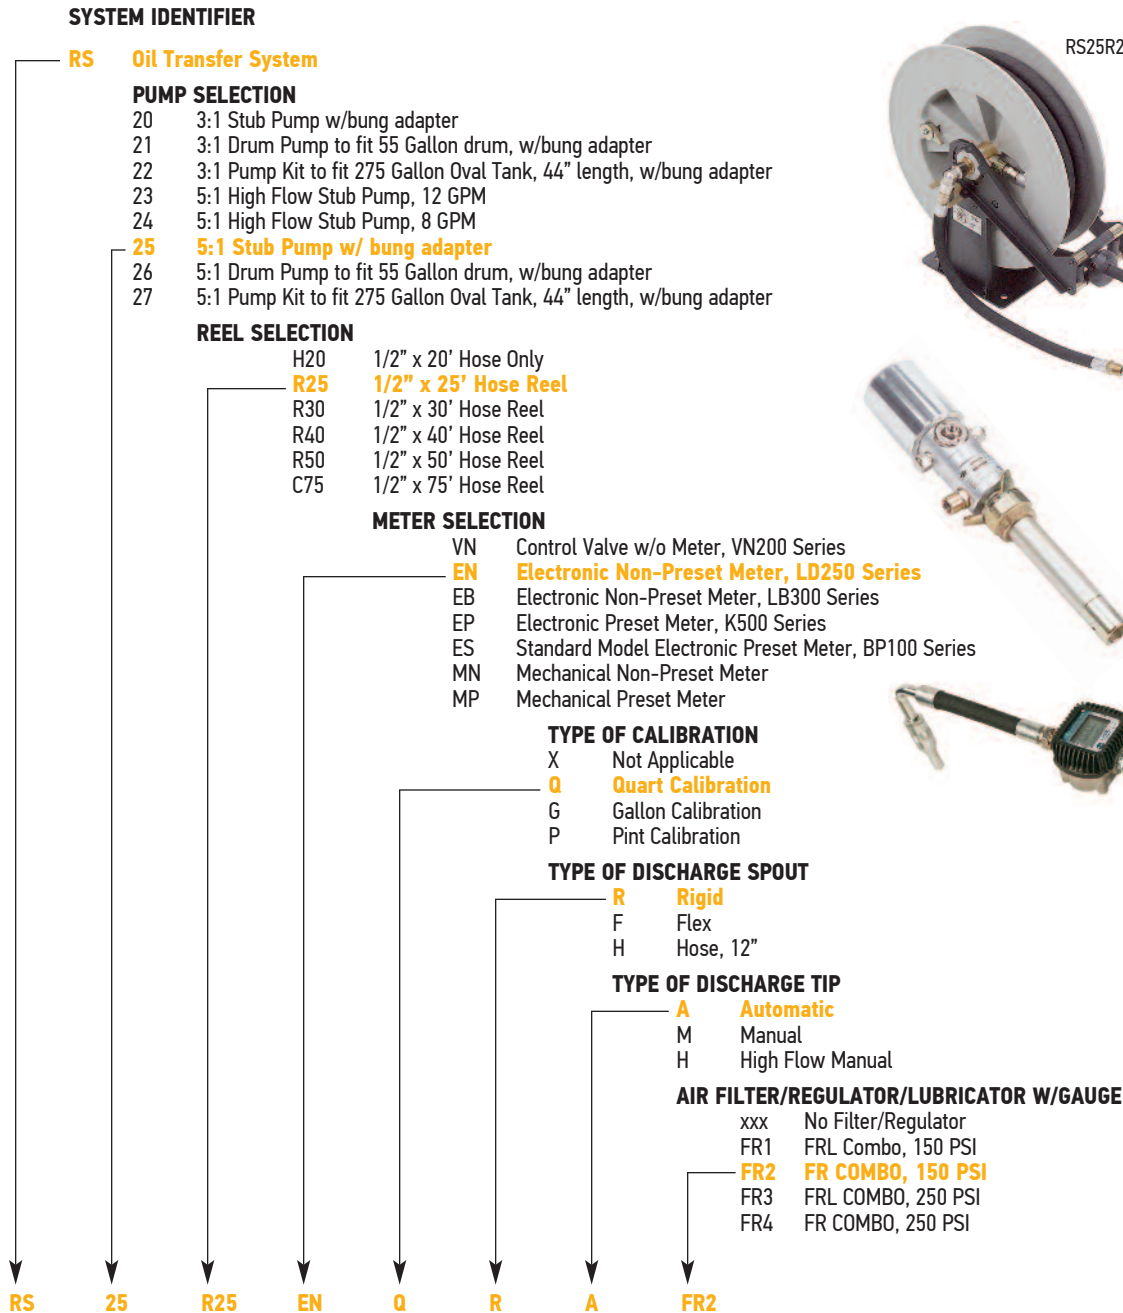

RS25R25ENQRAFR2 shown

Example: Transfer system w/ 5:1 pump, 25' Hose Reel, non-preset electronic meter w/quart calibration, rigid spout, automatic discharge tip and filter regulator combo w/gauge.

NOTE: For pricing see back section of price booklet.