

HAND OPERATED PUMPS



P/N **10007-S3**

Same as P/N 10007 above, but includes P/N 100200 Electronic Meter


MODEL **MA-7**, P/N 10007
Lever hand pump for use with heavy gear oils. Fits 16 gallon and 30 gallon drums. Comes complete with 2" bung adapter and 6' nylon reinforced discharge hose with curved discharge spout. Approx. 12 strokes/qt.

P/N **10007C**
Same as P/N 10007 above, but includes cover for 16 gallon drum.




MODEL **MA-70**, P/N 30200
Heavy duty gear oil hand pump designed to fit 5, 16, 30 and 55 gallon containers. Comes complete with 2" bung adapter, telescoping suction pipe, 6' nylon reinforced discharge hose, ball shutoff valve and curved discharge spout. Approx. 8 oz. per stroke, and four strokes per quart.

P/N **30200-S3**
Same as P/N 30200 above, but includes P/N 100200 Electronic Meter

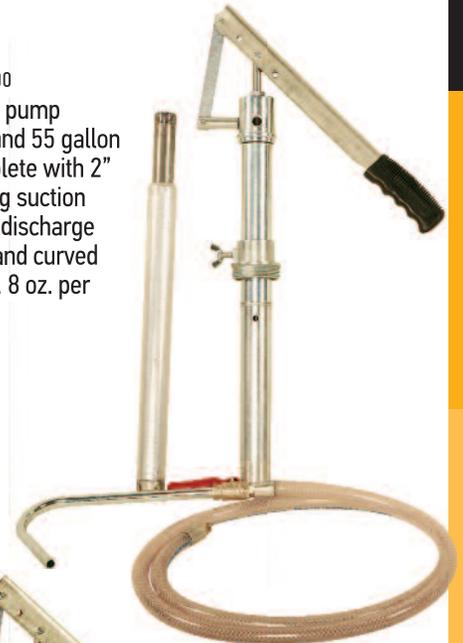

P/N **30200-S2**
Same as P/N 30200 above, but includes cover for 16 gallon drum.

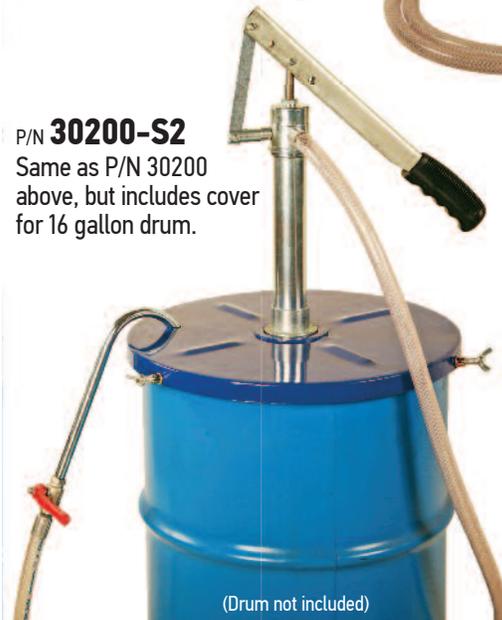

(Drum not included)


MODEL **FR31**, P/N 560028
Heavy cast iron quart stroke pump that reliably and accurately dispenses one quart with each handle rotation. Rack and pinion design allows for easy calibration. Provision for padlock feature. Includes swing return drain tube and telescoping suction pipe.



MODEL **FR112**, P/N 560003
Cast aluminum rotary vane pump suitable for pumping medium viscosity liquids as well as oils, gasoline and diesel fuels. Rotary action allows smooth, continuous fluid transfer at up to 10 gallons per 100 revolutions. Complete with telescoping suction pipe, bung adapter, 8 ft. nitrile hose with nozzle and vacuum breaker to prevent siphoning.



MODEL **FR152**, P/N 560000
Lightweight cast aluminum piston hand pump uses a stainless steel inner liner to prevent wear of cylinder. Pump delivers up to 20 gallons per 100 strokes and is ideal for use with gasoline, diesel fuel and light oils. Includes anti-siphoning device, padlock feature, bung adapter and telescoping suction pipe.

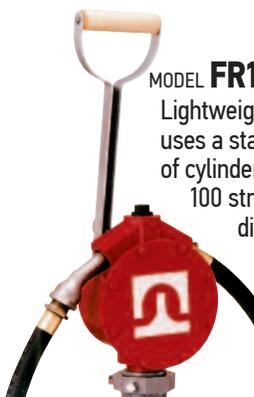

P/N **10015**
High Flow rotary hand pump discharges approximately 1 quart per revolution and can empty a 55 gallon drum in a matter of minutes. Pump body is constructed of lightweight aluminum with gear driven impellers and Nitrile seals which makes this pump ideal for transferring larger quantities of lightweight oils, hydraulic fluids, transmission fluid, antifreeze and diesel fuel.

Pump is supplied with bung adapter, suction pipe, inlet strainer and 1" x 6' oil discharge hose with nozzle.

