

HAND OPERATED PUMPS

MODEL MA-2, P/N 10002

Rugged polypropylene construction with polypropylene coated steel shaft and nitrile seals. Fits 5 to 55 gallon containers and comes with adapter to fit 2" buttress as well as 2" pipe threads. For use with light oils, hyd. fluid, ATF, mixed antifreeze and mild corrosive fluids. Approx. 14 strokes/gal.



MODEL MA-20, P/N 560008

Polypropylene piston pump uses Buna-N seals for transfer of fluids such as engine oil, gear oil, antifreeze and similar fluids compatible with materials of construction. Complete with telescoping suction pipe to fit drums up to 55 gallon. Approx. 12 strokes/gal.



MODEL MA-2N, P/N 10002N

Strong nylon body utilizes a stainless steel pump shaft and Teflon shaft seal for compatibility with a broad range of fluids. Pump is sized to fit 55 gallon drums, complete with 2" bung adapter and discharge spout.



MODEL MA-20V, P/N 560008V

Same as MA-20 except uses viton seals for use with diesel exhaust fluid (DEF) and various industrial chemicals such as mild acids and similar fluids.



MODEL MA-3, P/N 560006

Polypropylene plunger pump screws directly onto the Reike spout on 5 gallon containers. Complete with 5' nylon reinforced hose, ball valve nozzle and spout. For use with light oils, ATF, hyd. fluid and 100% antifreeze. Approx. 4 strokes/qt.



MODEL MA-31, P/N 10031

Polypropylene construction with nitrile seals and stainless steel piston shaft which allows use with water, water based chemicals, mild acids and mild alkali solutions as well as oils. Approx. 16 strokes/gal.

MODEL MA-3J, P/N 560006J

Same features and construction as the MA-3 above, except made to fit 2 1/2 gallon jug with 63mm cap. For use with light oils, ATF, hyd. fluid and 100% antifreeze. Approx. 1 fluid oz. per stroke.



P/N 560101

Buttress adapter allows use of NPT threaded pumps in plastic drums using buttress threads.




P/N 560102

NPT adapter allows use of buttress threaded pumps to be used on drums with NPT threads, 2" Buttress female x 2" NPT male.



MODEL MA-6, P/N 10006C

Heavy duty syphon pump constructed of polyethylene. For use with light oils, water, antifreeze and many chemicals. Flow rate of approx. 5 gal./min. nominal.

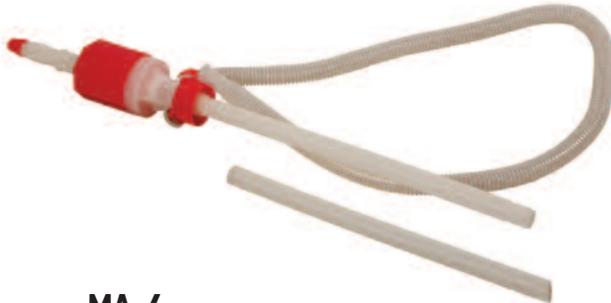

MODEL MA-40, P/N 560019

All brass plunger pump ideal for use with solvents and chemicals compatible with brass construction and PTFE seals. Complete with 2" NPT threads to fit 55 gallon drums. Approx. 1/2 pint/stroke. Ideal for use with brake cleaner fluids.

