




LIQUIDYNAMICS™

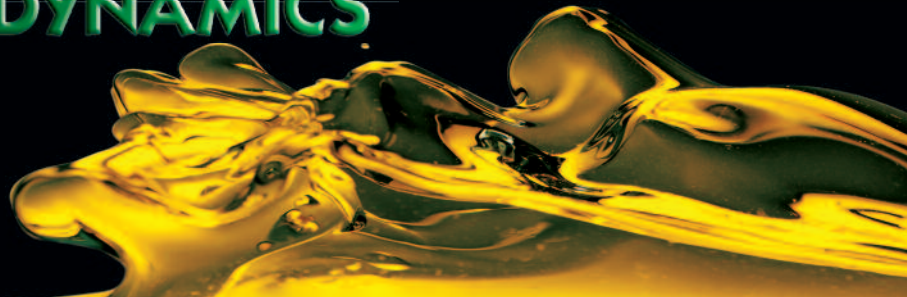

FLUID HANDLING
TECHNOLOGY

TWO WAY OIL TRANSFER

This convenient transfer cart allows you to quickly and easily extract new or used engine oil, gear oil, antifreeze, hydraulic fluid or other compatible fluids from engines, gear boxes, sumps or similar containers and transfer it to the large 75 gallon steel portable tank. The heavy duty 4 wheel cart provides portability of the collected fluid which can then be conveniently transferred from the portable 75 gallon tank by simply changing the position of the handle on the included 4 way reversing valve.

The heavy duty cart has a load capacity rating of 2,600 pounds and is equipped with two fixed wheels, two swivel wheels and a foot brake. Fluid transfer is accomplished using an on-board 3/4" aluminum double diaphragm pump with Buna N (NBR) seals and diaphragms. The cart system is supplied complete with air filter/regulator, air coupler quick disconnect set, tank gauge, prevent fill cap and 3/4" x 15' suction/discharge hose. The pump is rated at up to 27 GPM and can pass solids up to 1/16" dia. which makes this system ideal for collection and transfer of used oil.

Optional dry break disconnects and "T" strainers are available as shown below.

P/N **51009C-S16**

75 Gallon Cart for Two Way Oil Transfer.

P/N **51009C-S17**

95 Gallon Cart for Two Way Oil Transfer.



P/N 51009C-S16 with optional dry break disconnects shown



P/N **900294**
3/4" Female Coupler



P/N **900295**
3/4" Male Nipple



P/N **900325-100**
3/4" "T" Strainer

