

USED OIL DRAINS

P/N 42070

Low profile, Portable Used Oil Drain has a large 25-gallon capacity and two internal baffles to prevent sloshing. Has 9" overall height, 2½" silent, non marking P.P. casters and sturdy 'T' handle for easy maneuverability. Standard unit comes with 1" ball valve drain. Dry break disconnects available for use with Double Diaphragm Pumps. 9" H x 24½" W x 46" L.



P/N 42071


Same as P/N 42070 above except has an on board 3/8" Double Diaphragm Pump and 6' discharge hose with curved spout. Flow rate of 5 GPM @ 100 PSI will empty full drain in less than 5 minutes. Includes 'T' strainer to protect pump.



"T" Strainer with 30 Mesh Screen

P/N 950004

Evac kit only. 3/8" Double Diaphragm Pump, mounting hardware, 'T' strainer and 6' discharge hose with curved spout. Flow rate of 5 GPM @ 100 PSI will empty full drain in less than 5 minutes.

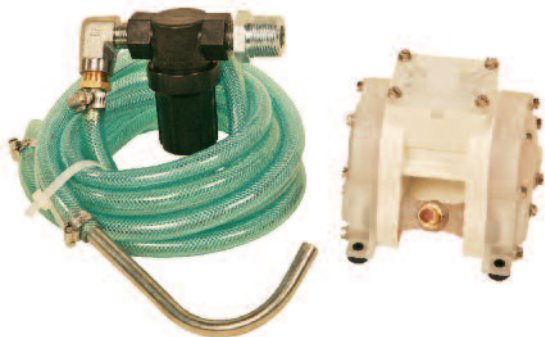

Male Dry Break Nipples:

- P/N **900291** 1/2" NPTF nipple
- P/N **900295** 3/4" NPTF nipple
- P/N **900293** 1" NPTF nipple




Female Dry Break Couplers:

- P/N **900290** 1/2" NPTF coupler
- P/N **900294** 3/4" NPTF coupler
- P/N **900292** 1" NPTF coupler



P/N 950093

1/4 HP, 115 VAC Electric Pump Kit with inlet screen. Pump is rated at 7 GPM and will empty full drain in less than 4 minutes.

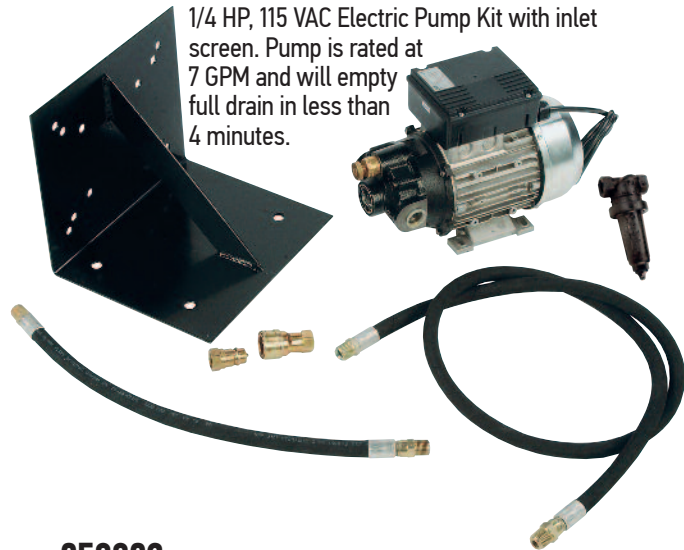

P/N 950092

1/2" Double Diaphragm Pump Kit with wall mounting bracket, 1/2" x 6' suction hose, 1/2" x 2' discharge hose, air filter regulator w/gauge, 3/8" x 6' air hose and 1/4" air coupler set and 1/2" dry break coupler set. Used to quickly empty low profile oil drain in less than 3 minutes (approximately 10 GPM at 100 PSI).



P/N 950095

3/4" Double Diaphragm Pump Kit, same as P/N 950092 above, except includes 3/4" suction hose, discharge hose and 3/4" dry break coupler set.