


OIL FILTER CRUSHERS

P/N **830151** MODEL C-4

Economical pneumatic oil filter crusher for use with automobile filters. Unit has four tons of crushing force, reduces filters by 75% of original size and removes 95% of the free flowing oil. Requires 125 to 175 PSI air pressure with 5 second cycle time. Chamber accepts filters up to 7½" tall and 6" diameter. Has 3/4"NPT drain connection.

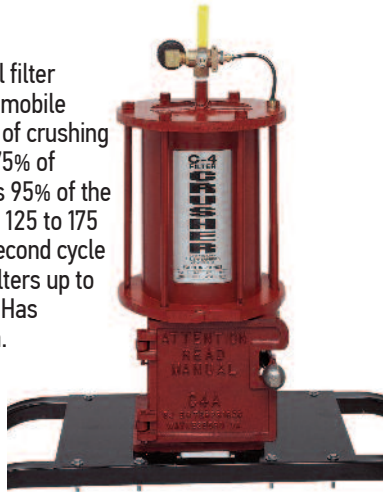


P/N **830152** MODEL C-6

This pneumatic crusher is ideal for use with SUV, automobile and light truck oil filters. It has 6 tons of crushing force with a chamber size to accept filters up to 10" tall and 7" in diameter.



P/N **830153** MODEL TT-12

Pneumatic oil filter crusher with 10 tons of crushing force, ideal for use with tractor trailer and truck filters. Will accept filters up to 17" tall and 8" in diameter or 4 automobile filters.

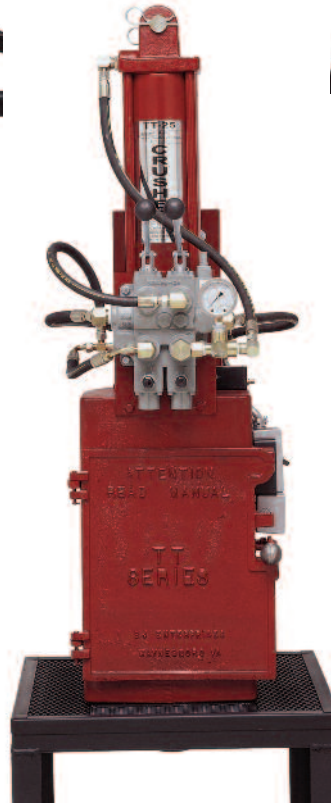

P/N **830154** MODEL TT-25EH

230 VAC Electric driven hydraulic oil filter crusher generates 25 tons of crushing force. Chamber will accept filters up to 16½" tall and 8" in diameter. Provides a smooth and constant crushing, action cycle time is 55 seconds and is ideal for use with tractor trailer filters.

P/N **830160**

Automotive filter crusher stand for use with models C-4 and C-6 crushers. Dimensions are 36" x 36" x 38" tall.



P/N **830161**

Truck filter crusher stand is constructed from industrial grade steel with a drain shelf for storing uncrushed filters. Has a 2" NPT drain to allow plumbing to storage vessel. This stand can be used with all four crushers shown above and may be secured to the floor.

